




Both Front and Back Side Deburring by One Holder !!

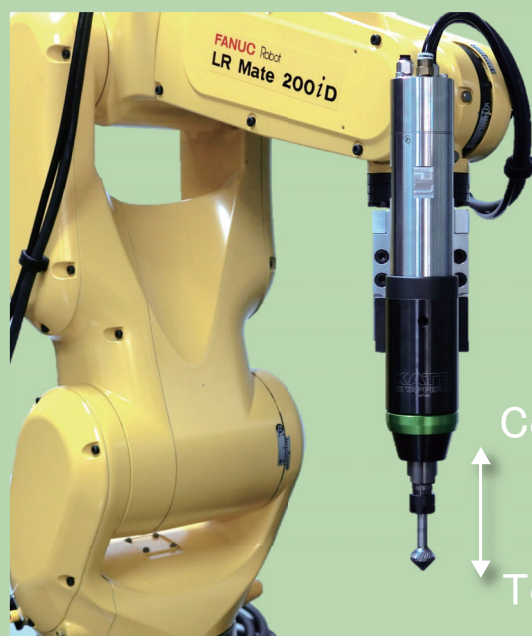

- The tools follows the shape of the workpieces
- Prevent shaving too much
- Stable deburring volume

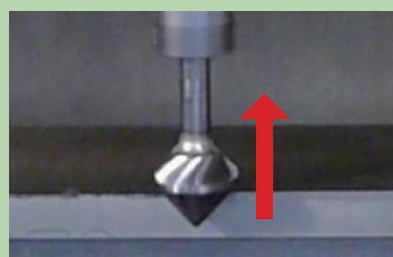

Processing the front surface
with compressing

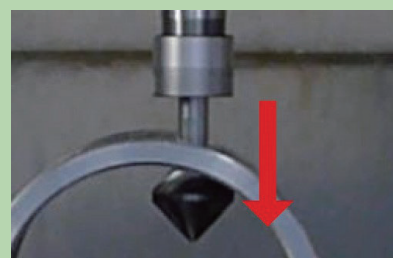

Processing the back side
with extending

Cutting Example of 3 defferent spring loads


YELLOW Soft



GREEN Medium



RED Hard



----- Before -----




Material: FCD400

Recommending cutting tool

W616-SP

※You can use
other commercial
cutting tools



YOUTUBE link




Specifications

- Permissible maximum speed:
10000min⁻¹
- Maximum diameter
of the tool shank: $\phi 7$ (ER11)
- Floating: ± 10 mm
- Machining Condition:
Dry cutting or Air blow
- Spring load setting:
YELLOW(Soft), GREEN(Medium), RED(Hard)
- Tools: Carbide Rotary Bars,
wire brush with arbors etc.


System




Option



Dimensions

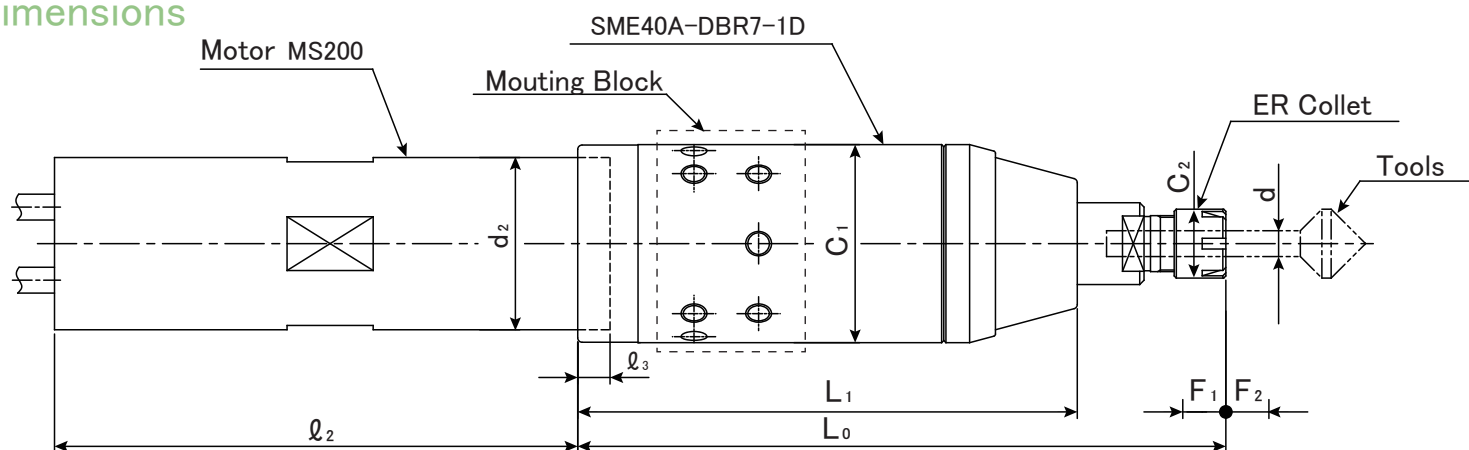

Model

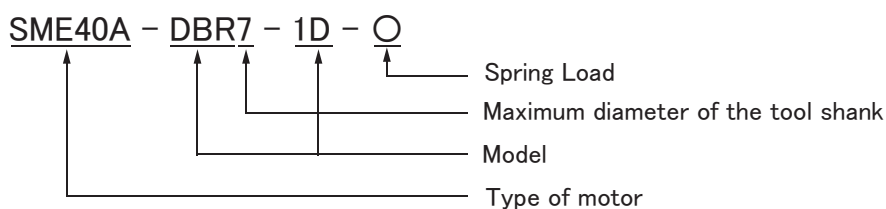

Unit : mm

Model	L_0	L_1	C_1	C_2	F_1	F_2	Motor body			Shank diameter of cutting tool	Weight (including motor)
							d_2	ℓ_2	ℓ_3		
SME40A-DBR7-1D-○ ^{※1}	150.5	116	46	16	10	10	40	121.5	7.5	$\phi 3 \sim \phi 7$	2.1kg

※ F_1 : Tension, F_2 : Compression

※ 1: Spring load setting YELLOW / GREEN / RED

Manufacturer

KATO MFG.CO.,LTD

2-65,Shinmachi,Hiratsuka,Kanagawa,JAPAN
TEL:+81-463-36-1511

<https://kato-koki.com/eng/>

Distributor and dealer